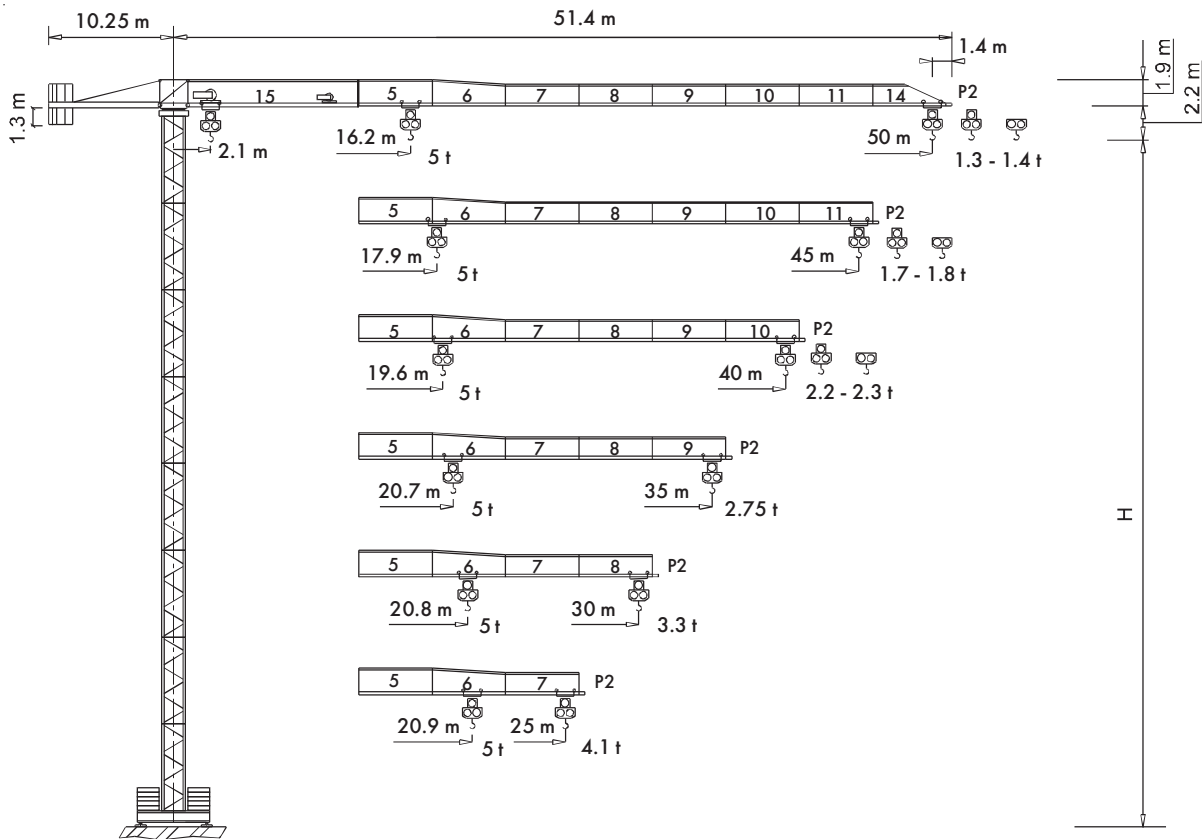




TEREX | COMEDIL


БАШЕННЫЙ КРАН «FLAT TOP»



FEM 1.001 A3

“CITY” СТТ 91 -5 TS12

Картограмма нагрузки

		СТТ 91 - 5										
		м	5	12	15	20	25	30	35	40	45	50
2.5T	- 30.63 м	T	2.5	2.5	2.5	2.5	2.5	2.5	2.14	1.83	1.59	1.4
2.5T	- 29.53 м	T	2.5	2.5	2.5	2.5	2.5	2.45	2.04	1.73	1.49	1.3
5T	- 16.16 м	T	5	5	5	3.93	3.04	2.45	2.04	1.73	1.49	1.3
2.5T	- 33.93 м	T	2.5	2.5	2.5	2.5	2.5	2.5	2.41	2.07	1.8	
2.5T	- 32.74 м	T	2.5	2.5	2.5	2.5	2.5	2.5	2.31	1.97	1.7	
5T	- 17.88 м	T	5	5	5	4.41	3.42	2.77	2.31	1.97	1.7	
2.5T	- 37.19 м	T	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.3		
2.5T	- 35.92 м	T	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.2		
5T	- 19.58 м	T	5	5	5	4.88	3.8	3.08	2.58	2.2		
2.5T	- 35 м	T	2.5	2.5	2.5	2.5	2.5	2.5	2.5			
5T	- 20.68 м	T	5	5	5	5	4.04	3.29	2.75			
2.5T	- 30 м	T	2.5	2.5	2.5	2.5	2.5	2.5				
5T	- 20.76 м	T	5	5	5	5	4.06	3.3				
2.5T	- 25 м	T	2.5	2.5	2.5	2.5	2.5					
5T	- 20.94 м	T	5	5	5	5	4.1					

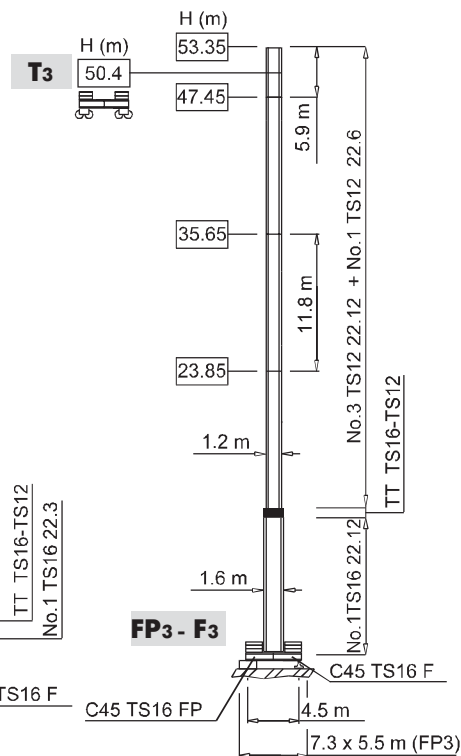
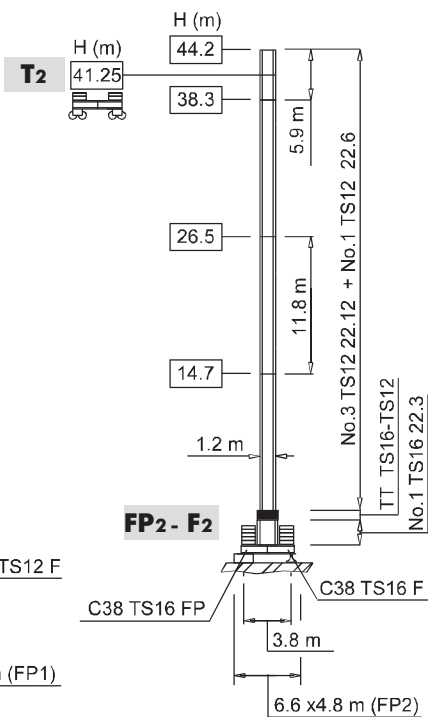
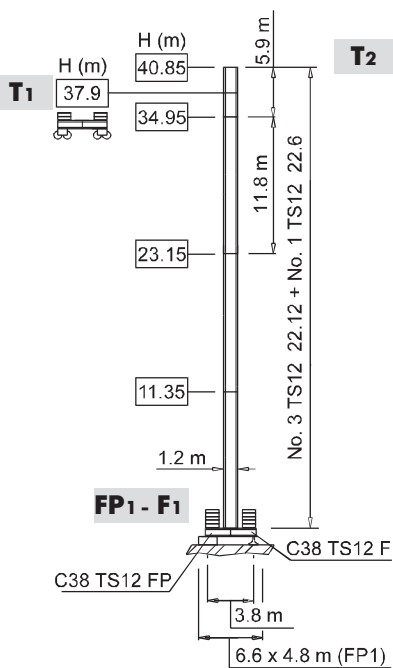
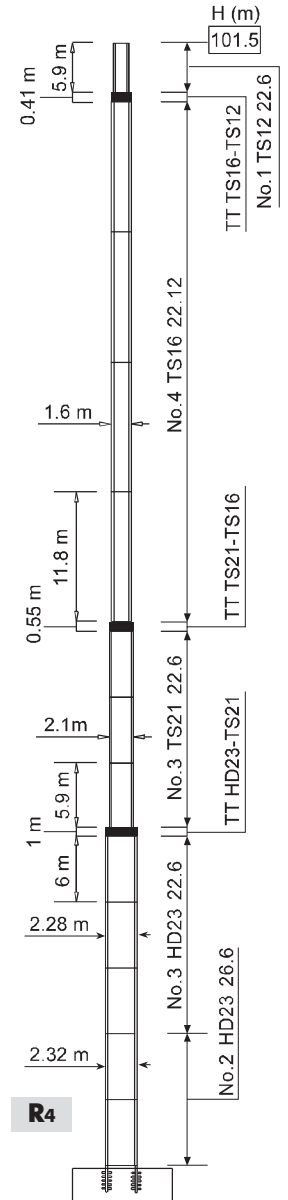
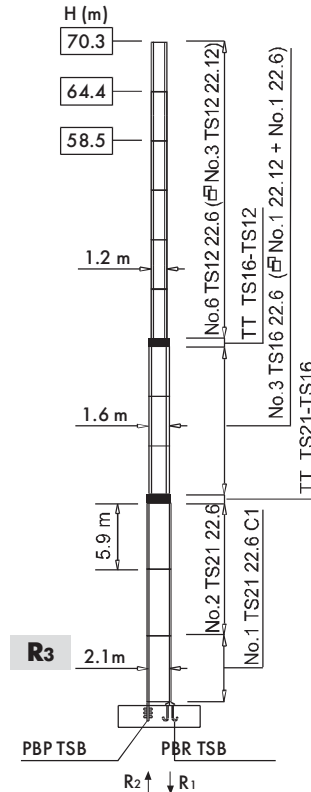
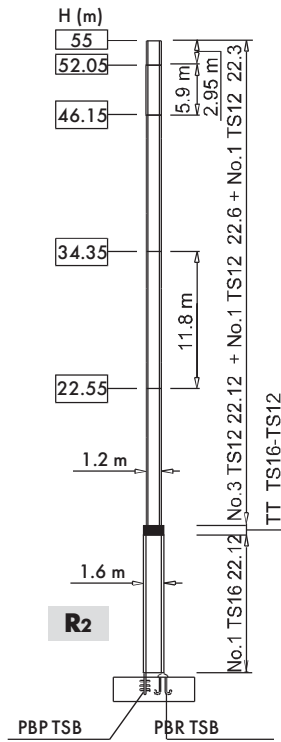
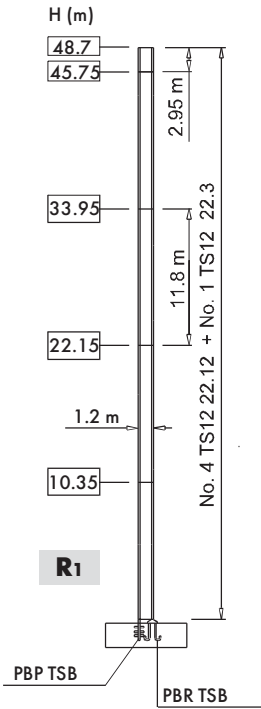
Другие конфигурации







Башня

Доступны длины секций башни TS: 11.8 м, 5.9 м и 2.95 м









TS12







Механизмы









			
	11 APC 25	31 кВА*	2000/14/CE
	15 AFC 25	40 кВА*	
	18 AFC 25	41 кВА*	
		400 В – 50 Гц	
		400 В – 50 Гц / 460 В – 60 Гц	

* Кран без оборудования для перевозки

		м/мин	т	кВт					
	11 APC 25		6	2.5	11	186 м			
			20	2.5					
			40	1.25					
		3	5						
		10	5						
		20	2.5						
15 AFC 25 (VARIANT)		0 ⇒ 1.7	2.5	15	186 м				
		1.7 ⇒ 6	2.5						
		6 ⇒ 28	2.5						
		28 ⇒ 46	1.44						
		46 ⇒ 57	1.1						
		0 ⇒ 0.85	5						
		0.85 ⇒ 3	5						
		3 ⇒ 14	5						
		14 ⇒ 23	2.88						
		23 ⇒ 28.5	2.2						
		18 AFC 25 (VARIANT)				0 ⇒ 2.2	2.5	18	310 м
						2.2 ⇒ 8	2.5		
8 ⇒ 34	2.5								
34 ⇒ 55	1.46								
55 ⇒ 69	1.1								
	0 ⇒ 1.1		5						
	1.1 ⇒ 4		5						
	4 ⇒ 17		5						
	17 ⇒ 27.5		2.92						
		27.5 ⇒ 34.5	2.2						

	DAD 2 2 D1	0 – 22 – 44 м/мин	2.2 – 1.5 кВт
	DVF 3 4 D5 (Variant)	0 ⇒ 6 ⇒ 30 ⇒ 60 м/мин	4 кВт
	SSR 1 1 50	0 ⇒ 0.76 об/мин	1 x 65 Нм
	▲ TAD 1 RP 2 M3	0 – 24 м/мин	2 x 3 кВт
	● TAD 2 RP 2 M3		
		i	

	▲	●
	Максимальная Н [м]	
T ₁	37.9	-
T ₂	41.25	-
T ₃	-	50.4

-  Подъем
-  Перемещение
-  Поворот
-  Передвижение
-  Указания по уровню шума
-  Проконсультируйтесь с нами
-  Потребляемая мощность
-  Источник питания

Gru Comedil s.r.l.

A Terex Company



Divisione Automontanti

Via S. Egidio 42/A, 33074 Fontanafredda (PN) - Italy
Tel. (+39) 0434 567 311 - Telefax (+39) 0434 998631

Via Alessandrina, 25 - 20095 Cusano Milanino (MI) - Italy
Tel. (+39) 02 613 16011 - Telefax (+39) 02 613 16034

Internet e-mail: info@comedil.com
Internet home page: www.comedil.com

Internet e-mail: info.CBR@comedil.com